



Tracked platform TR15GT

Tracked platform TR15GT

STANDARD EQUIPMENT

- Working height: 15,6 m
- 1,3m Flyjib
- Auto platform level with 3 auto adjust
- Alu basket with hand guard rail and tool tray
- Proportional electro-hydraulic controls by fingertip joysticks
- Ground and platform controls
- Ground pressure sensors on all outrigger plates with audible and visible alarms
- Chassis level sensor 1° with acoustic alarm
- 230V outlet in the basket
- Ground and upper controls with tarp cover
- Hourmeter
- Manual recovery with hand pump
- Platform rotator
- Colour of the machine: RAL3002 (red)

SPECIFICATIONS



Working Height 15,6 m

Platform Height 13,6 m

Horizontal Reach (220kg) 7,5 m



Platform Capacity 220 kg

Slewing 355°

Flyjib 1.3 m

Platform dimensions 1,2x0,8x1,1 m

Platform rotator 2x70°



Transport length 5,18 m

Transport length (without Pf) 4,22 m

Transport width 0,78 m

Transport height 1,99 m



Total weight:
(230V, 2,2KW & Kubola
Z482 diesel (13,3ps) 2100 kg

Outrigger footprint
Outrigger plate outer edge ca. 3,0 m



Gradeability 12° (21,3%)



Max. towing speed 1,6 km/h



Gradeability 18° (32,5%)

OPTIONS

- Auto chassis level
- Custom colour
- G.R.P. basket with tool tray (2 person)
- Outrigger plate pads

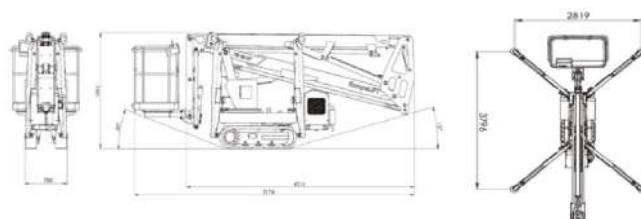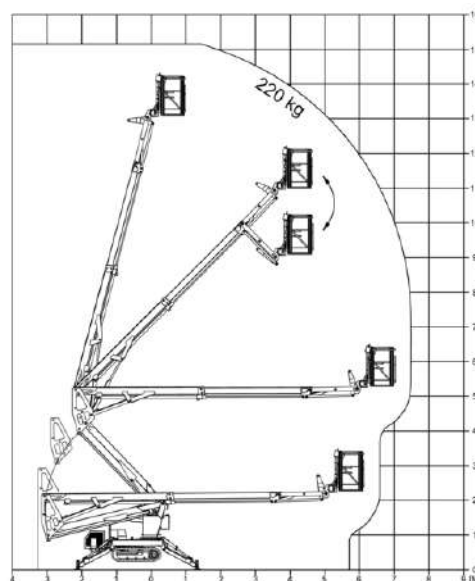

www.instant.no

INSTANT

Norway

Tel.: +47 23 19 11 00
info@instant.no

Lithuania

Tel.: +370 5 233 1096
info@instant.lt

Latvia

Tel.: + 371 263 58 152
info@instantlatvija.lv

Estonia

Tel.: +372 680 76 33
info@instant.ee